

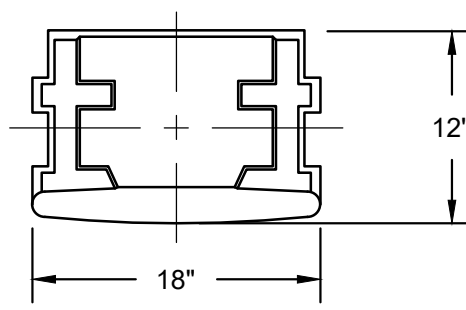



VERDURA® 30 RETAINING WALL STANDARD DETAILS

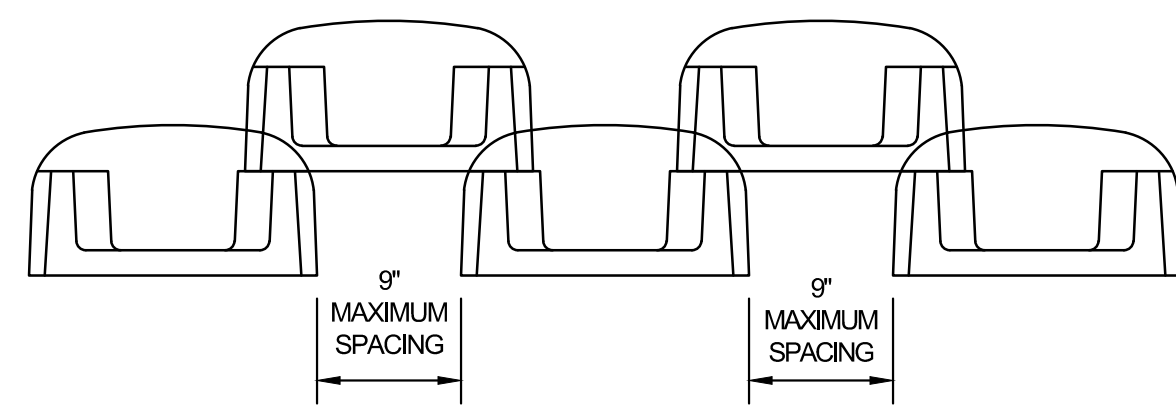

TOP VIEW

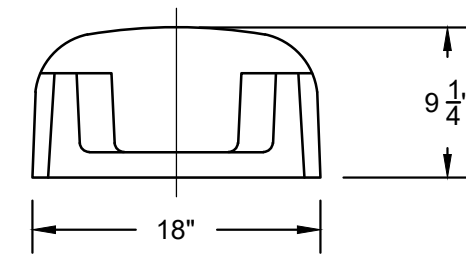


FRONT VIEW

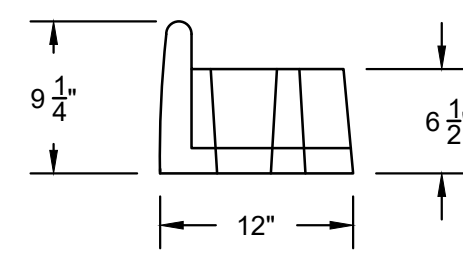


SIDE VIEW

VERDURA 30 BLOCK DETAIL

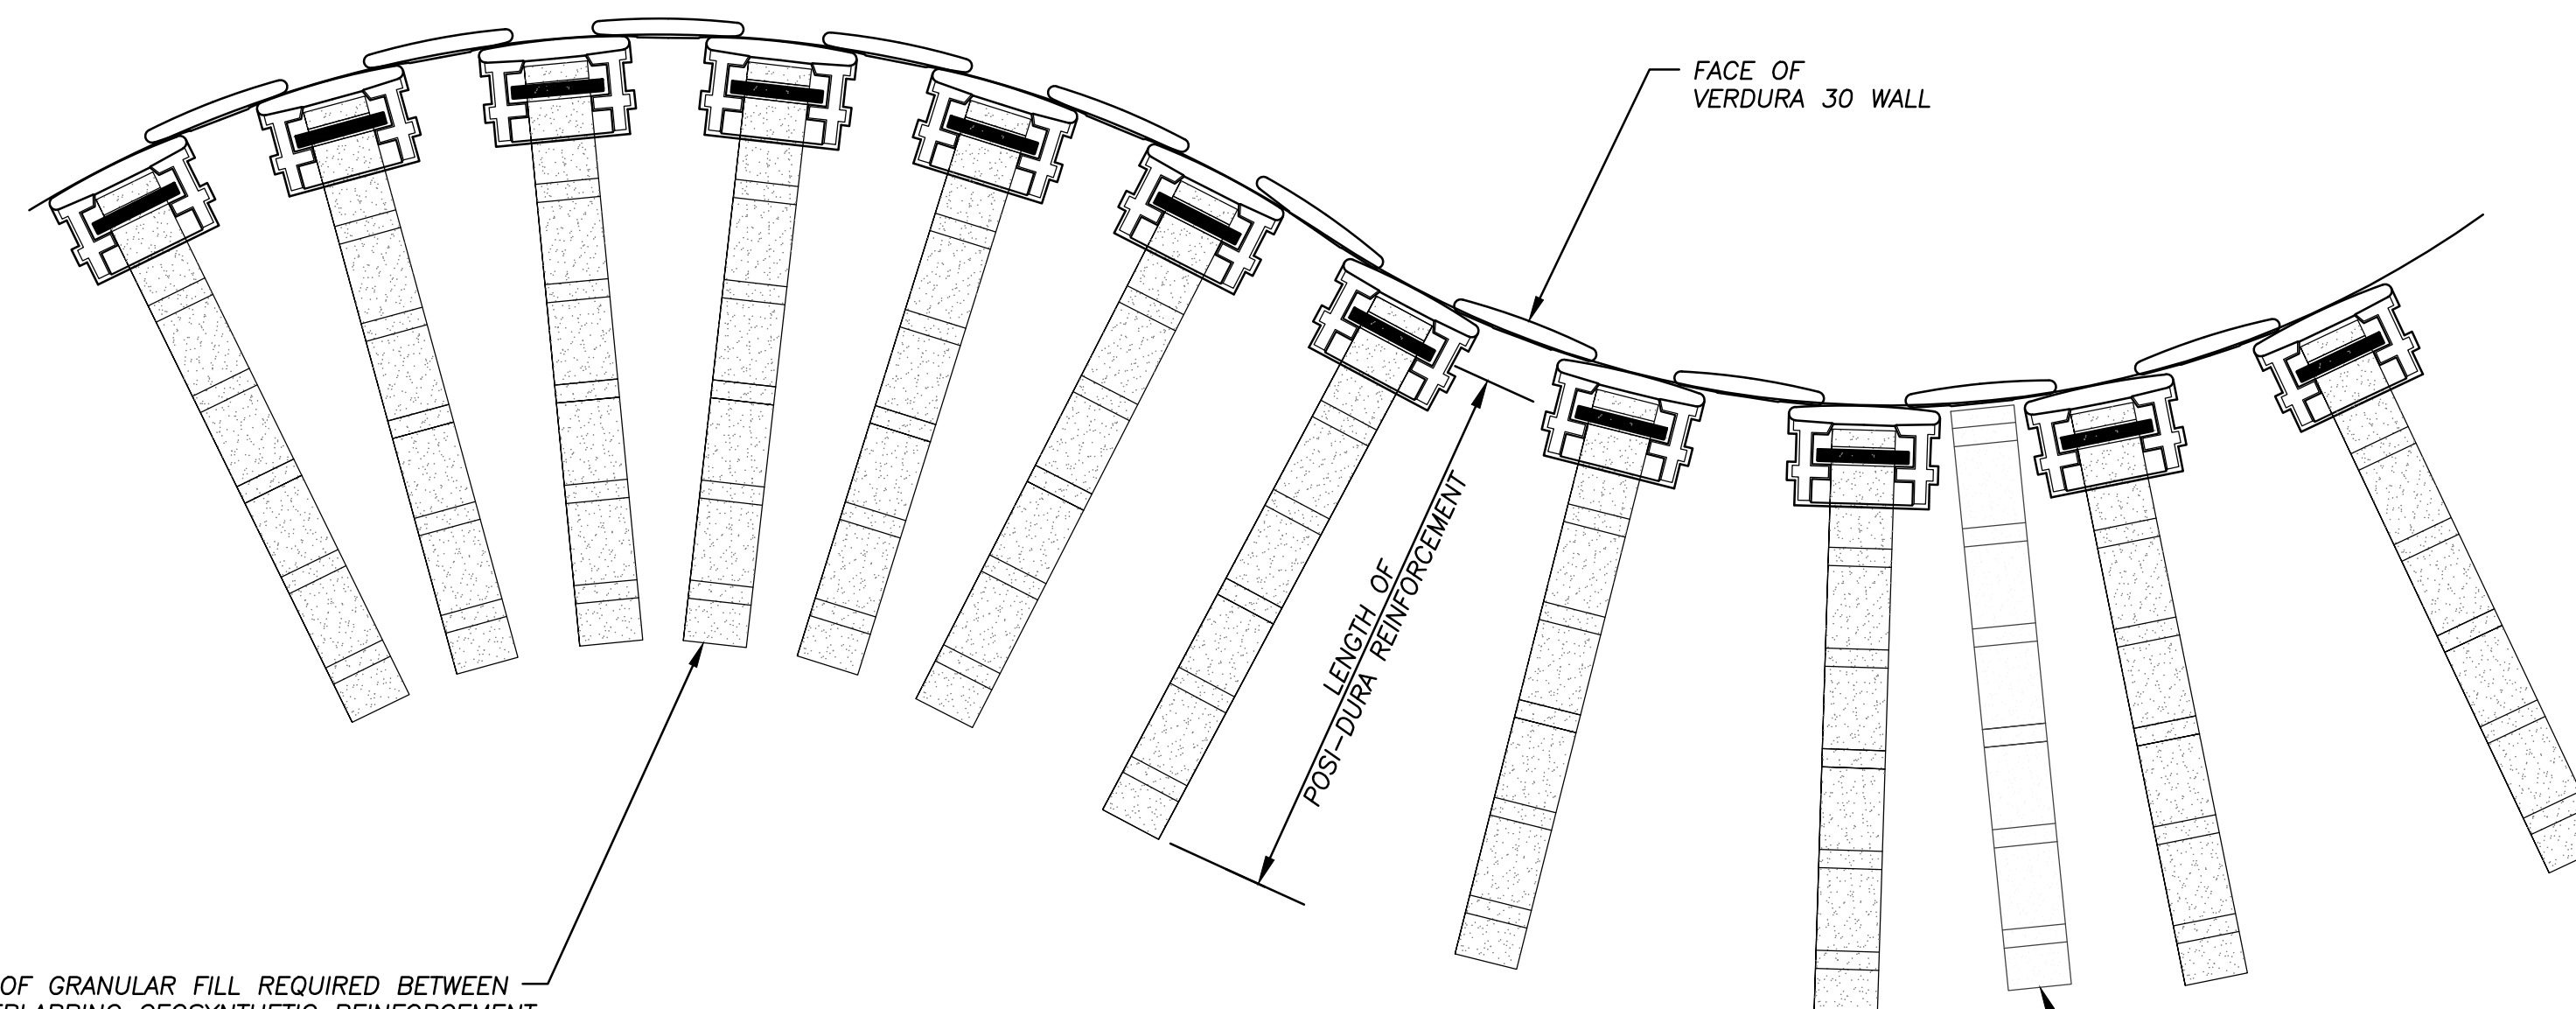


POS-DURA PLACEMENT ON CURVES DETAIL


3" OF GRANULAR FILL REQUIRED BETWEEN OVERLAPPING GEOSYNTHETIC REINFORCEMENT FOR PROPER ANCHORAGE. (ONLY WHEN MORE THAN 3 REINFORCEMENTS OVERLAP)

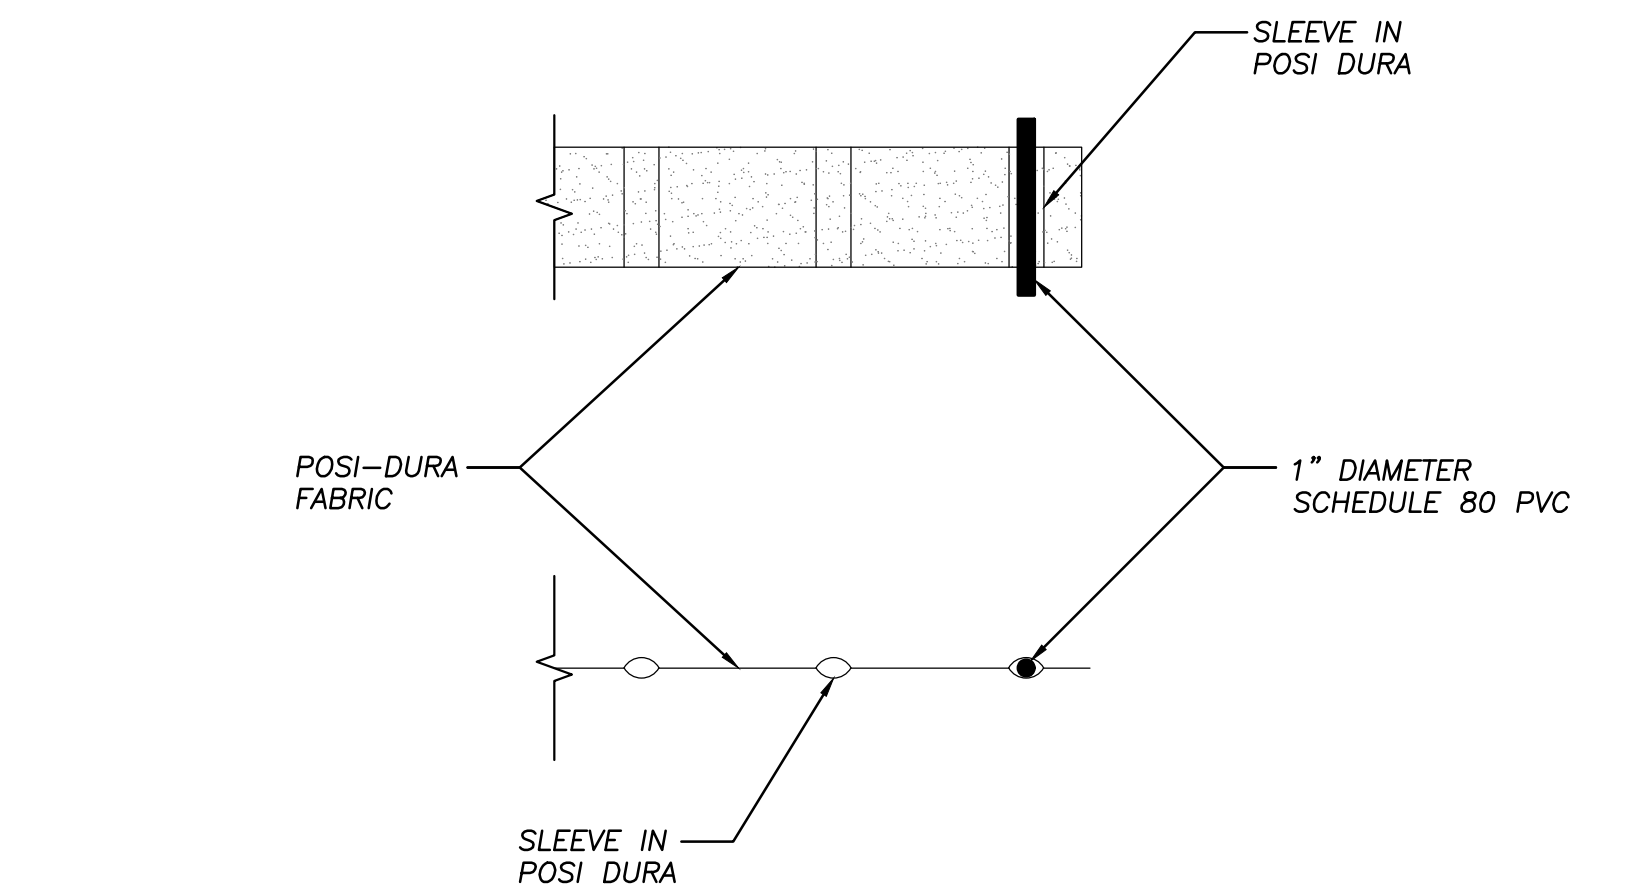

POS-DURA PIPE THROUGH FABRIC CONNECTION DETAIL

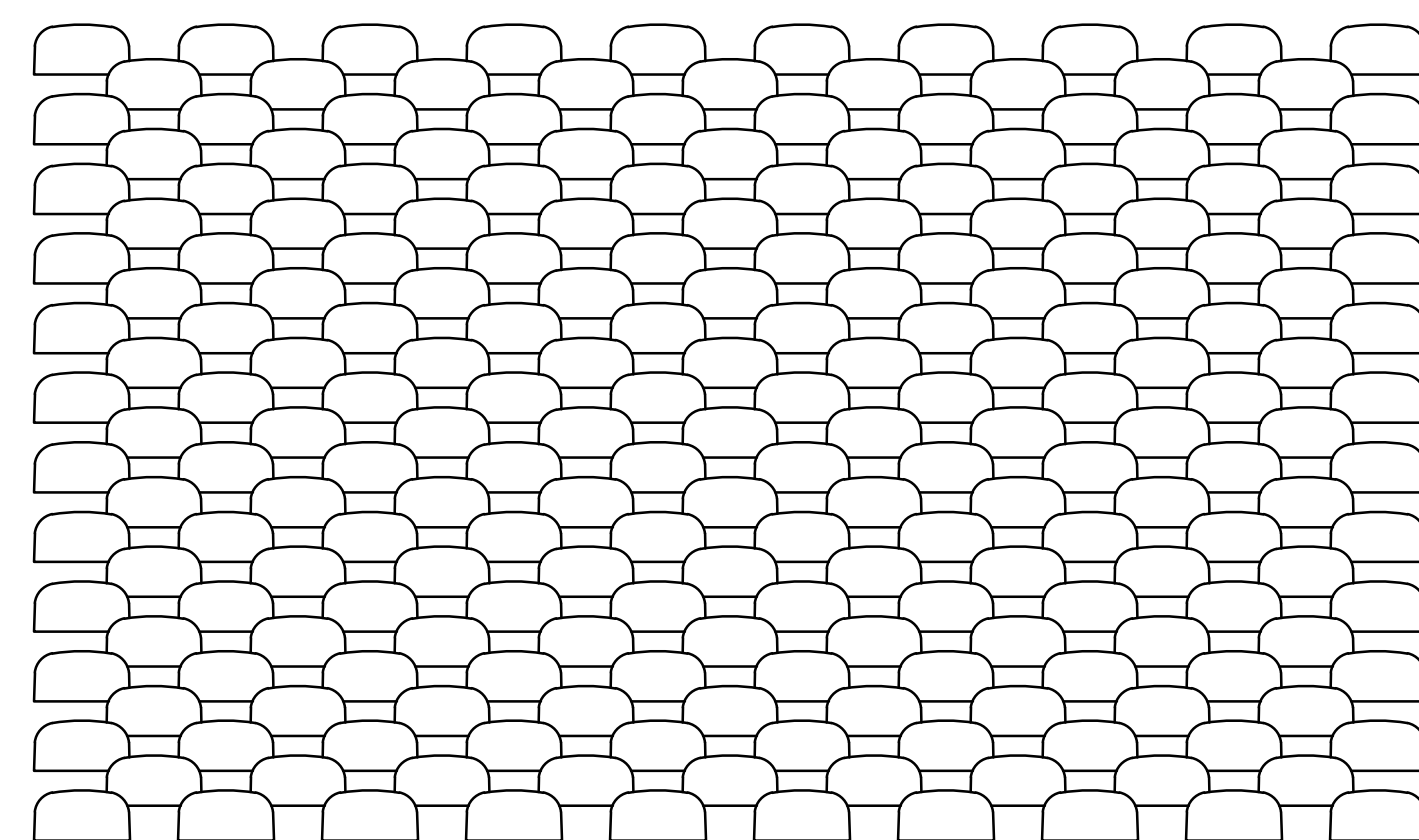


FRONT OF WALL DETAIL

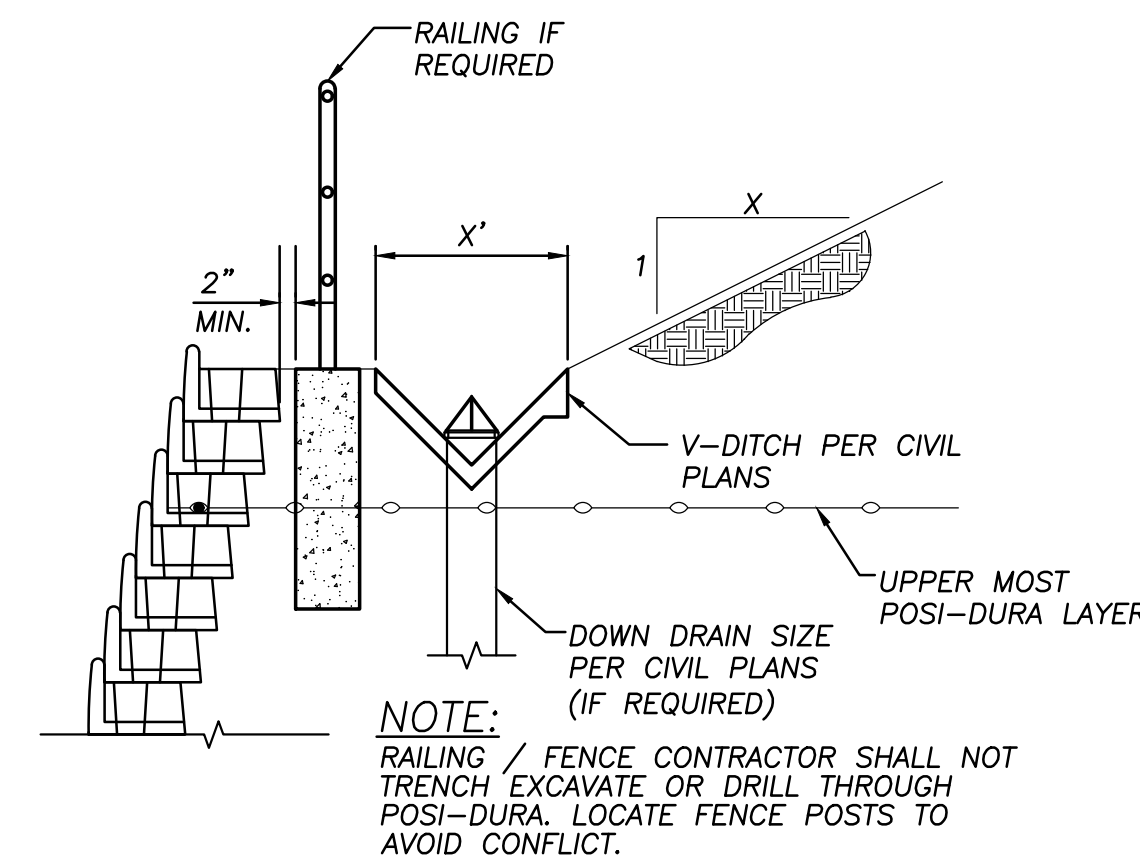


TYPICAL SLOPE CONDITION DETAIL

NOTE: RAILING / FENCE CONTRACTOR SHALL NOT TRENCH, EXCAVATE OR DRILL THROUGH POSI-DURA. LOCATE FENCE POSTS TO AVOID CONFLICT.

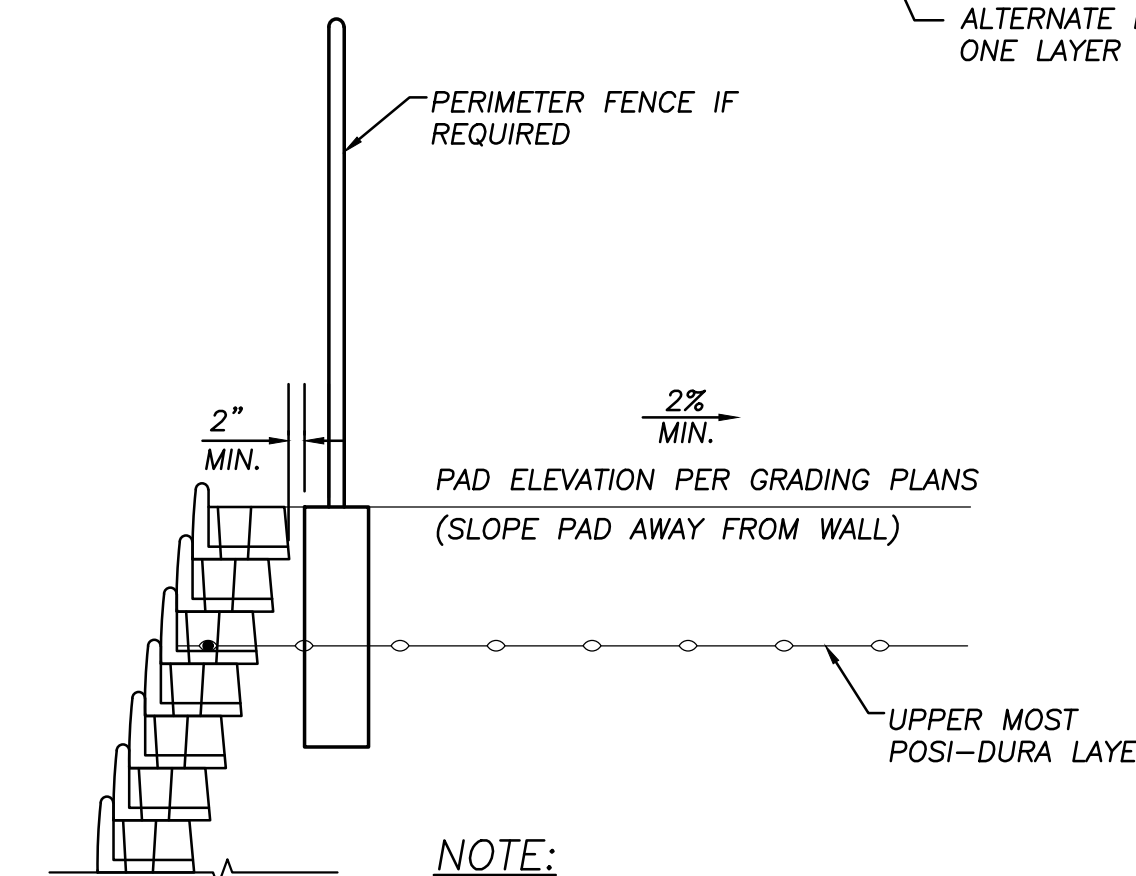

TYPICAL LEVEL CONDITION DETAIL


NOTE: RAILING / FENCE CONTRACTOR SHALL NOT TRENCH, EXCAVATE OR DRILL THROUGH POSI-DURA. LOCATE FENCE POSTS TO AVOID CONFLICT.

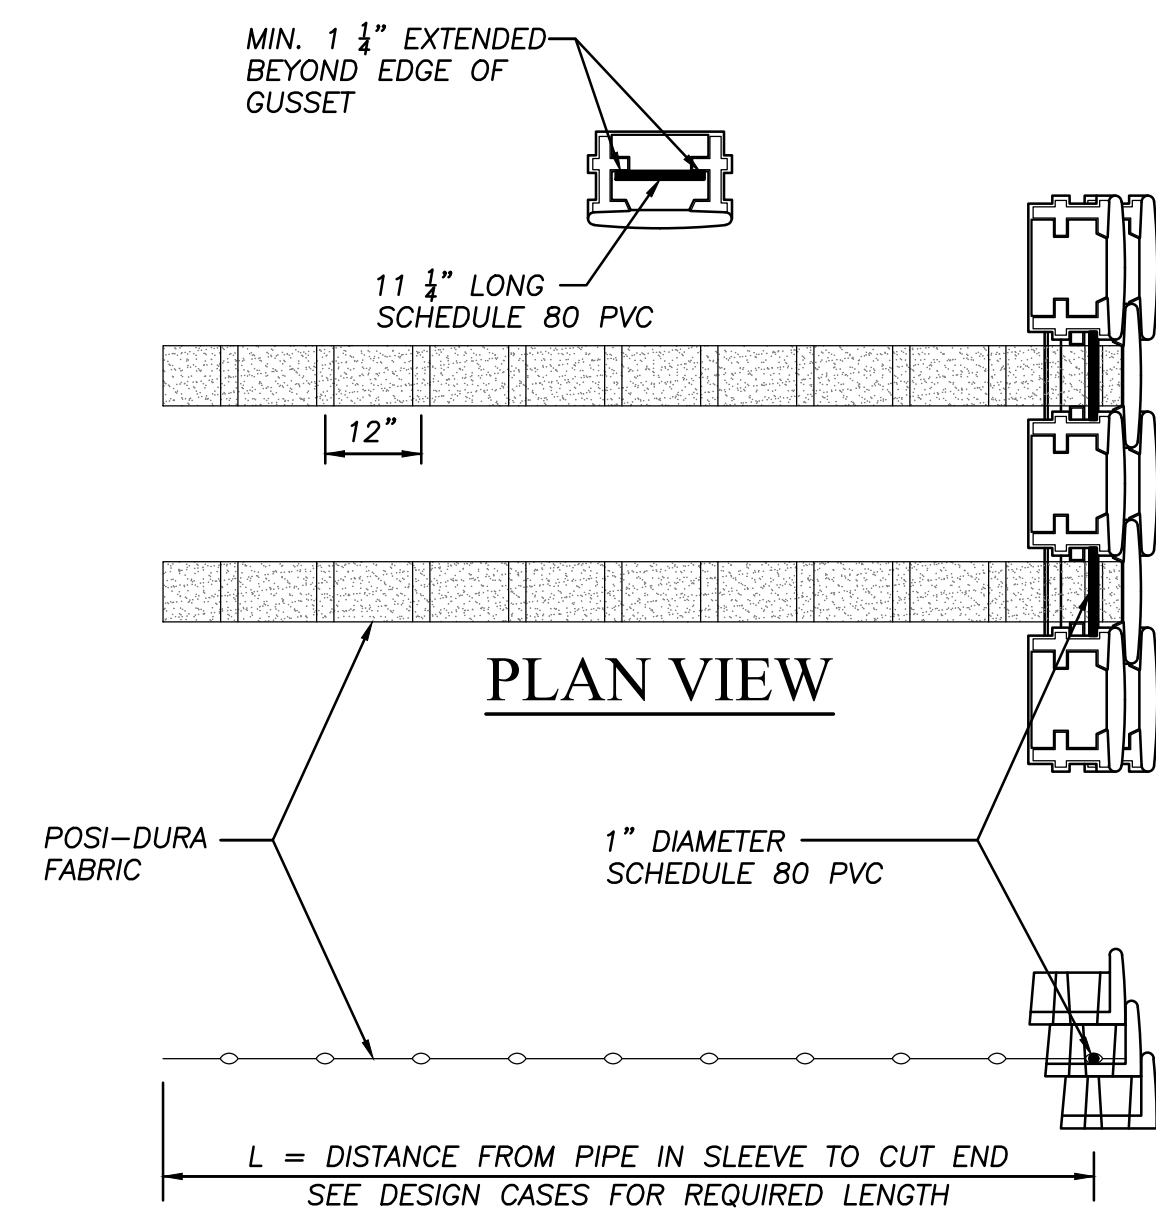


PLAN VIEW

SIDE VIEW


POS-DURA CONNECTION DETAIL

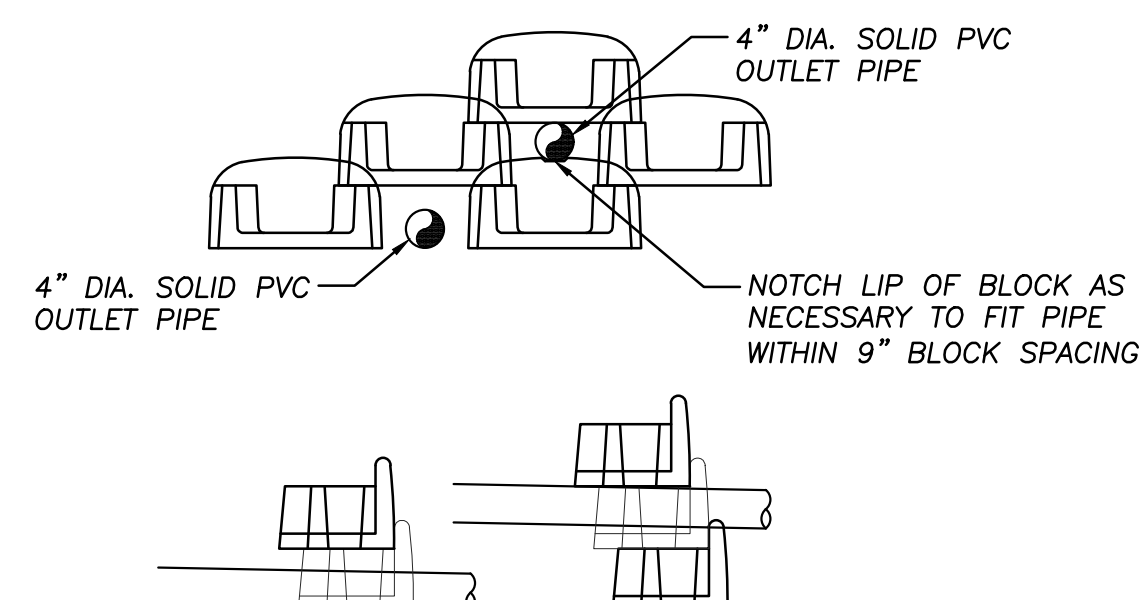

TYPICAL SUBDRAIN OUTLET DETAILS

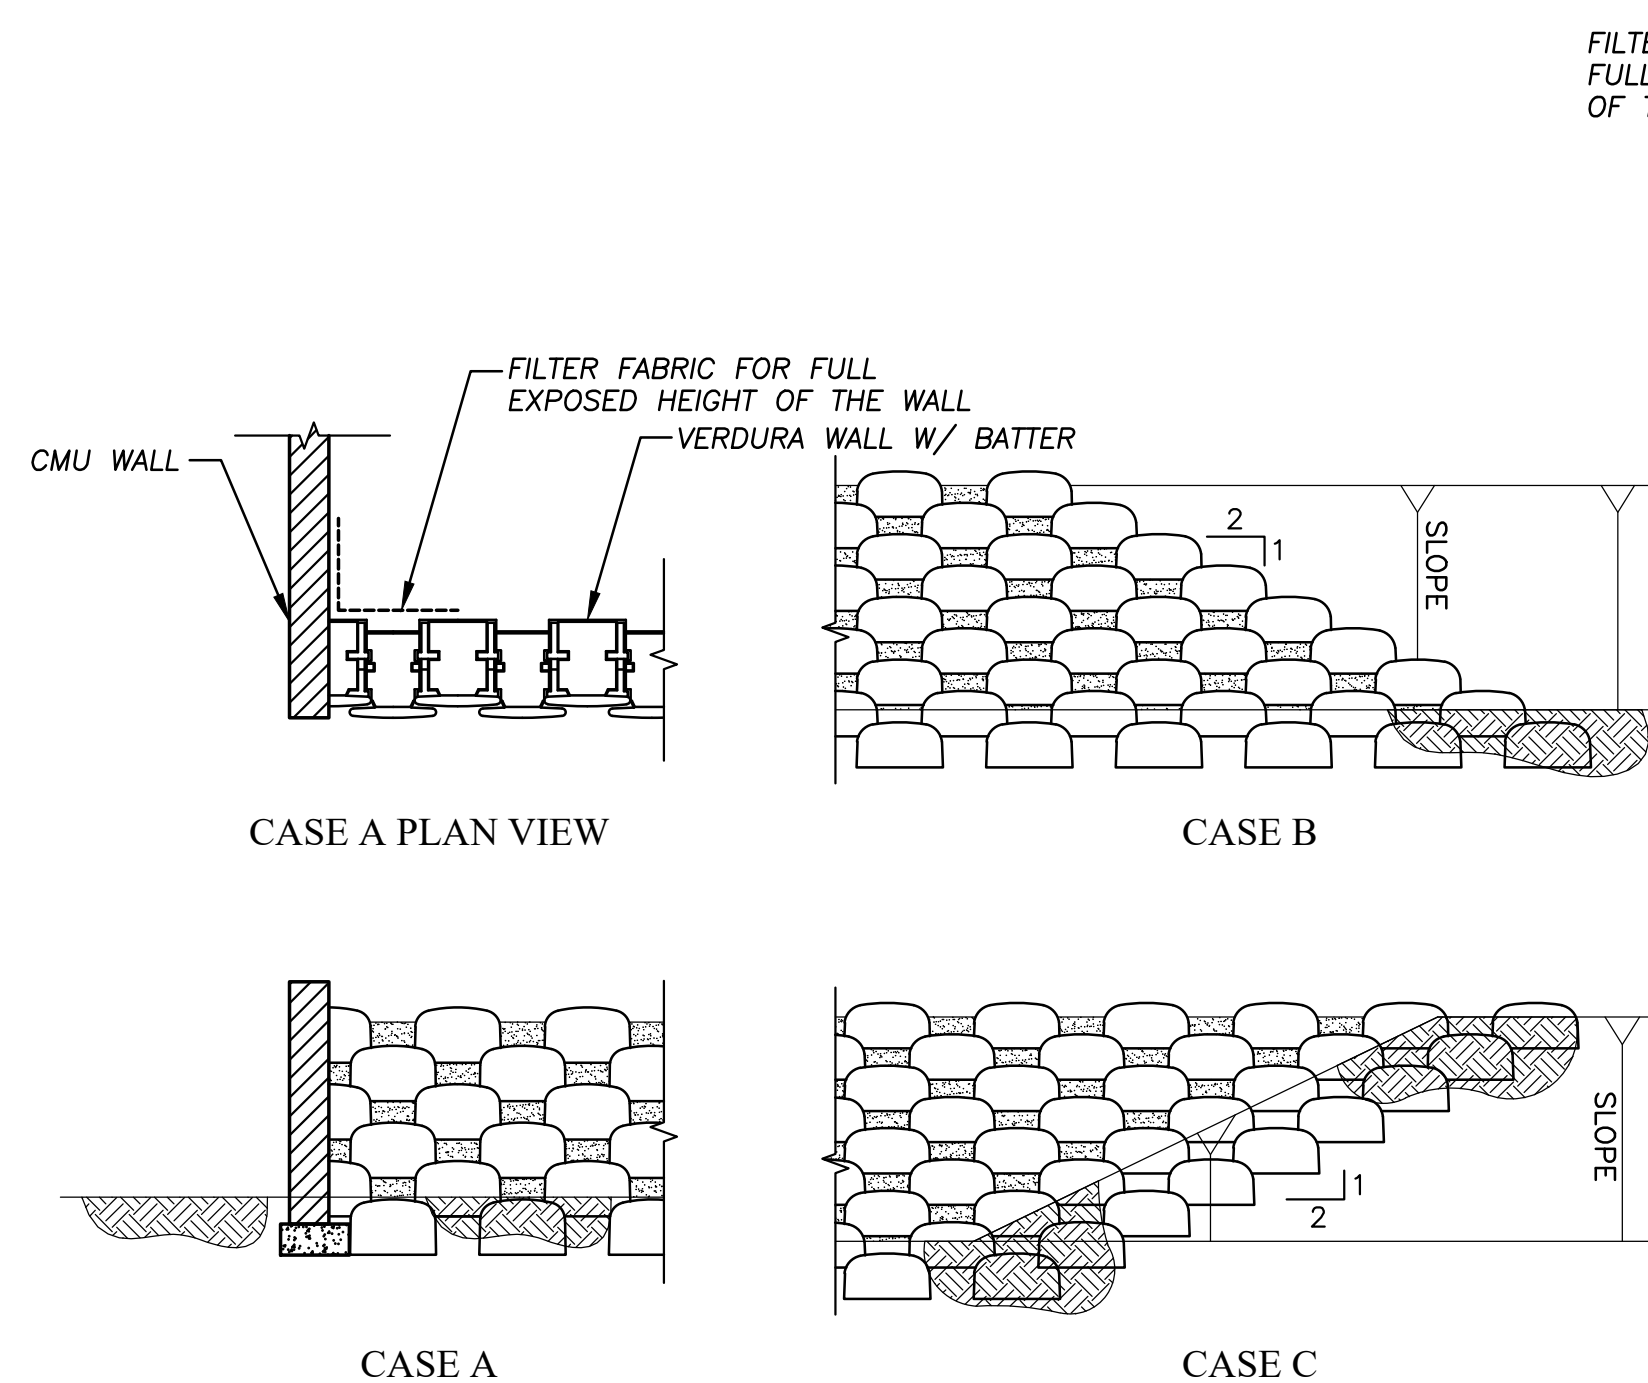


END OF WALL TRANSITION DETAIL

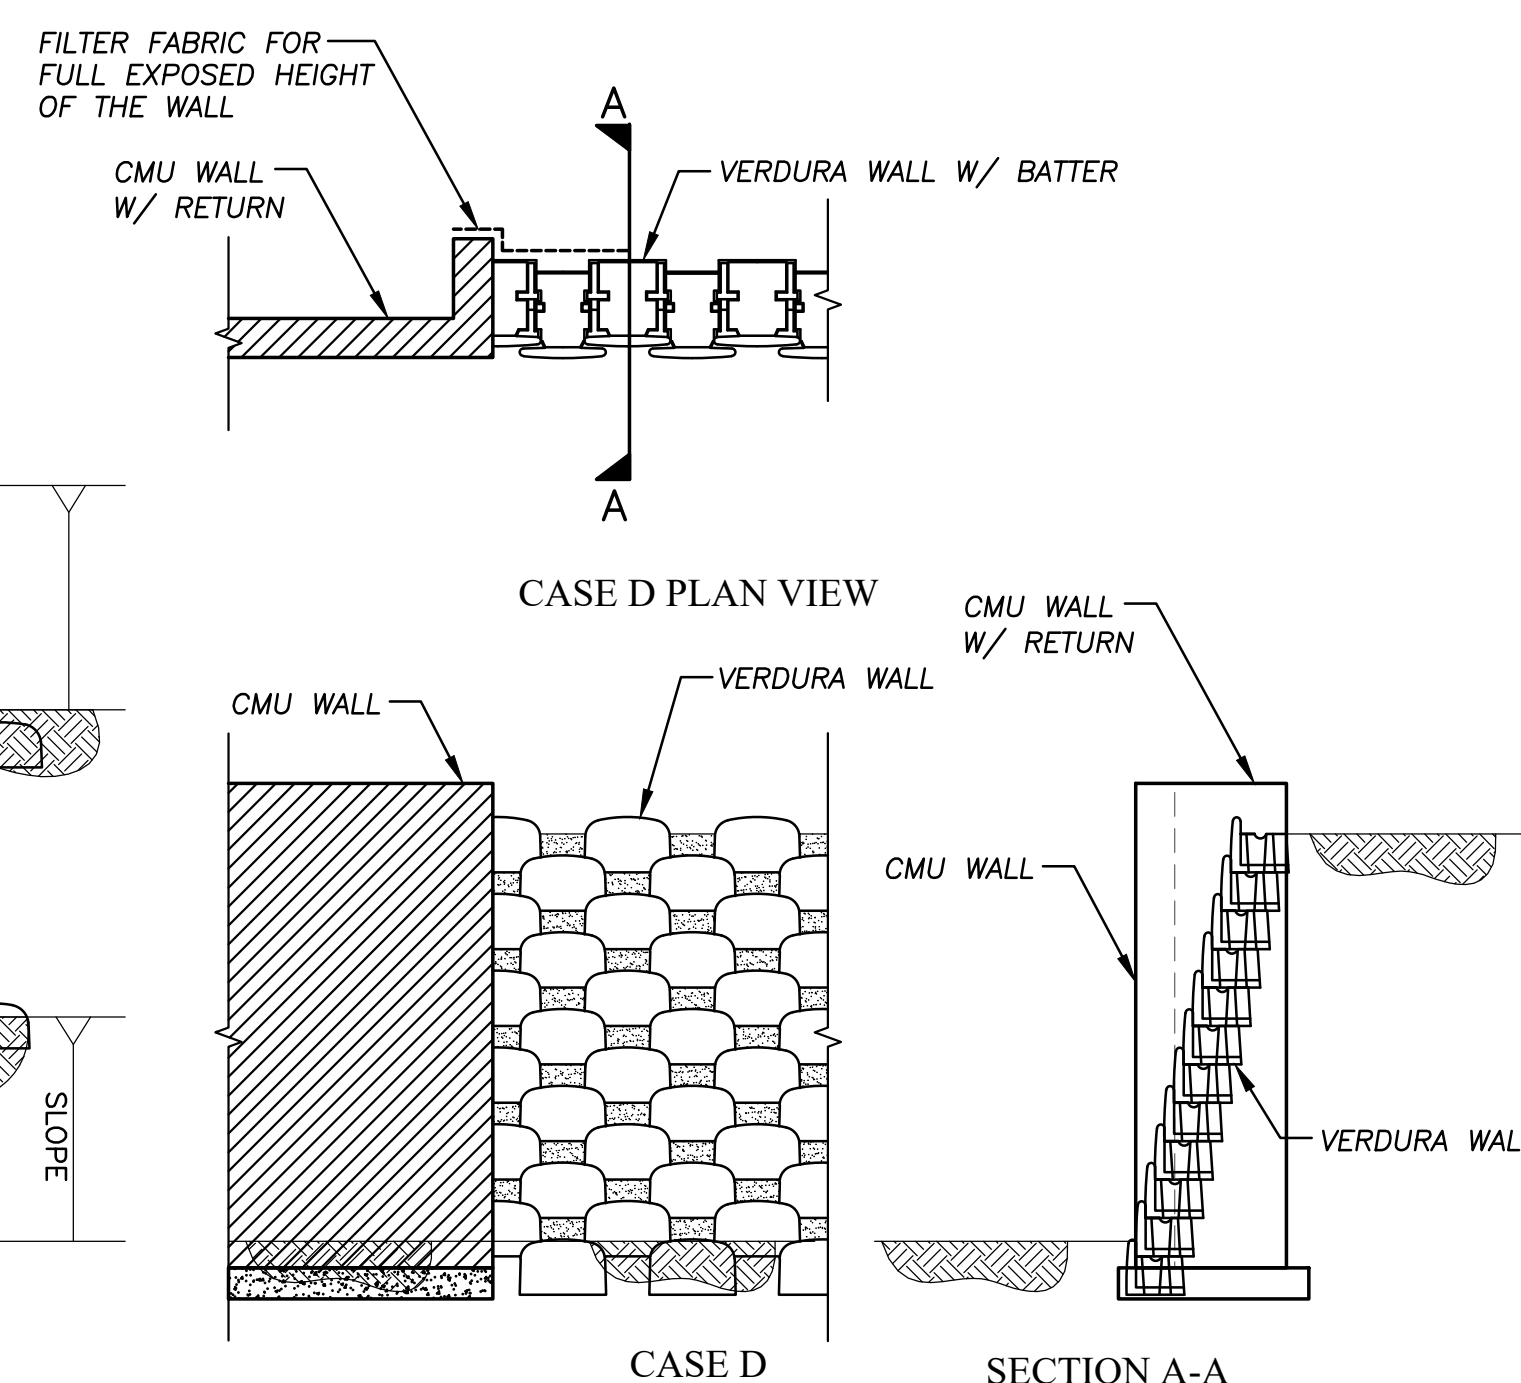

CASE D PLAN VIEW

CASE D

SECTION A-A

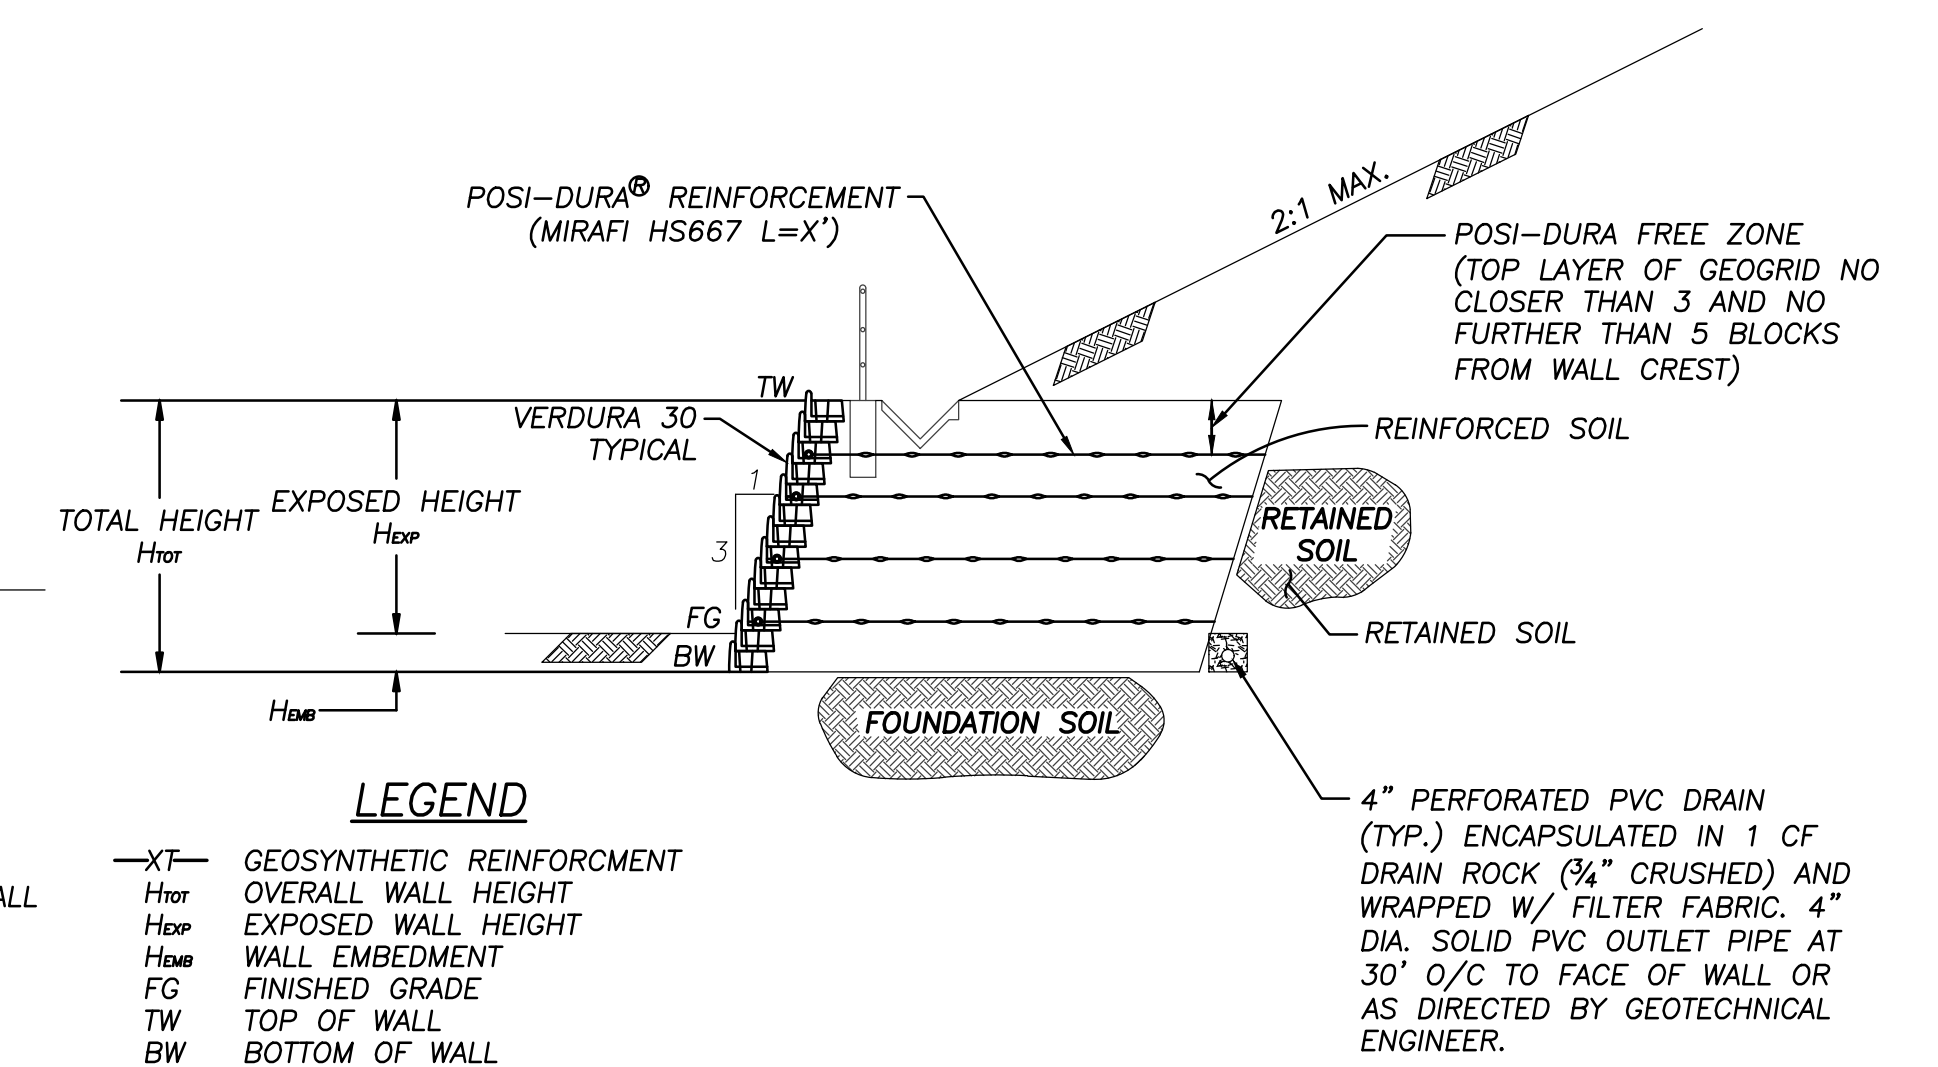

LEGEND

—XT— GEOSYNTHETIC REINFORCEMENT
 H_{tot} OVERALL WALL HEIGHT
 H_{exp} EXPOSED WALL HEIGHT
 H_{emb} WALL EMBEDMENT
 FG FINISHED GRADE
 TW TOP OF WALL
 BW BOTTOM OF WALL

TYPICAL CROSS SECTION DETAIL



PROTECTED BY US AND INTERNATIONAL PATENTS AND TRADEMARKS
 (800) 346-7995 www.soilretention.com